


UC2

16-48" (406-1219mm)

The UC2 is typically used in light cleaning during the construction phase. However, it can be used in all phases of pipeline cleaning. The UC2 is equipped with two Series C cups specifically designed to perform efficiently and reliably.

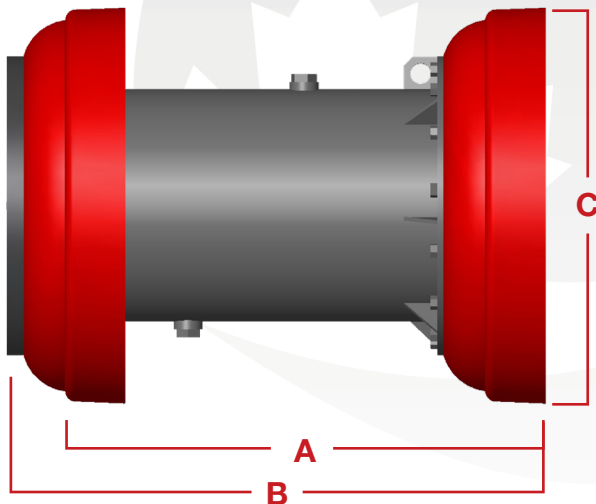

Size	A	B	C	Part #
16"	19.000	22.020	16.000	70-3802-16
18"	20.500	23.625	17.875	70-3802-18
20"	22.875	26.375	19.875	70-3802-20
22"	25.125	28.875	21.875	70-3802-22
24"	27.750	31.375	23.875	70-3802-24
26"	29.875	34.000	25.875	70-3802-26
28"	32.250	36.500	28.000	70-3802-28
30"	34.125	38.875	29.875	70-3802-30
32"	36.375	41.000	32.000	70-3802-32
34"	38.625	43.125	34.000	70-3802-34
36"	40.625	45.750	36.000	70-3802-36
42"	47.375	52.750	42.125	70-3802-42
48"	51.500	57.500	47.750	70-3802-48

Designed to negotiate 1.5D and greater bends.

Features & Benefits:

- Equipped with Series C cups made from Reliathane, Apache's special blend of wear-resistant polyurethane.
- Large wearing surface of the cup promotes longer life while the edge holds firmly against the pipe wall.
- Every UC 16" – 48" pig is manufactured with by-pass ports. These ports feature threaded plugs that can be removed.
- Standard bumper noses cushion the pig and help to protect in-line auxiliary equipment.

Options Available:

- CARVER discs. See page 5-20 for additional information.
- Aluminum Gauge Plates in standard styles or slotted styles. See page 6-4 for additional information.
- Radial and Block Brush options available. See pages 5-23 to 5-26 for additional information.
- Magnets to collect metallic debris. See page 6-2 for additional information.
- Transmitter Cavity to accommodate electronic tracking equipment. See page 6-5 for additional information.
- Rattlers. See page 6-5 for additional information.