


UM3X

16-48" (406-1219mm)

The three-cup design of the UM3X provides a positive seal between fluids for efficient batching. In comparison to the UM3, the UM3X includes block brushes to upgrade it to a moderate cleaning pig.

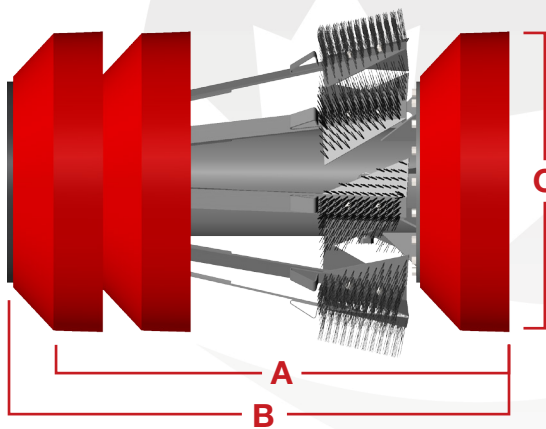

Size	A	B	C	Part #
16"	25.020	28.070	15.875	60-5143-16
20"	31.716	35.330	20.000	60-5143-20
22"	35.818	39.715	22.000	60-5143-22
24"	36.468	40.848	24.000	60-5143-24
30"	45.460	50.619	29.875	60-5143-30
36"	56.182	62.686	36.000	60-5143-36
42"	66.305	73.542	42.000	60-5143-42
48"	74.601	82.941	48.000	60-5143-48

Designed to negotiate 1.5D or greater bends.

Features & Benefits:

- Equipped with three Apache Series M cups made from Reliathane, Apache's special blend of wear-resistant polyurethane.
- The Conical M cup can traverse pipeline anomalies of up to 20% without damaging inline auxiliary equipment.
- Every UM 16" – 48" pig is manufactured with by-pass ports. These ports feature threaded plugs that can be removed.
- Standard bumper noses cushion the pig and help to protect in-line auxiliary equipment.

Options Available:

- CARVER discs. See page 5-20 for additional information.
- Aluminum Gauge Plates in standard styles or slotted styles. See page 6-4 for additional information.
- Radial and Block Brush options available. See pages 5-23 to 5-26 for additional information.
- Magnets to collect metallic debris. See page 6-2 for additional information.
- Transmitter Cavity to accommodate electronic tracking equipment. See page 6-5 for additional information.
- Rattlers. See page 6-5 for additional information.