


ED

16-48" (406-1219mm)

When it comes to displacing air and water, the ED pig gets the job done, quickly and efficiently. With its bi-directional design, it can travel in either direction.

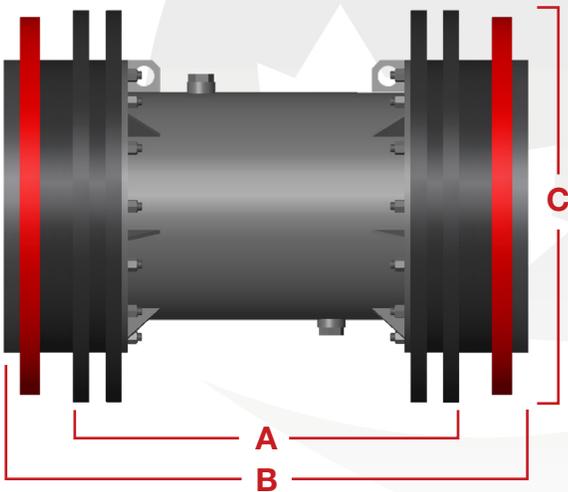

Size	A	B	C	Part #
16"	15.000	22.250	15.875	70-7056-16
18"	17.000	24.250	17.875	70-7056-18
20"	19.250	27.250	20.000	70-7056-20
22"	21.500	29.500	22.000	70-7056-22
24"	23.750	32.250	24.125	70-7056-24
26"	25.750	34.250	26.125	70-7056-26
28"	27.750	37.500	28.250	70-7056-28
30"	29.750	39.500	30.250	70-7056-30
32"	32.000	42.750	32.375	70-7056-32
34"	33.500	44.250	34.375	70-7056-34
36"	35.250	47.000	36.500	70-7056-36
42"	41.250	54.250	42.125	70-7056-42
48"	46.500	61.750	48.875	70-7056-48

Features & Benefits:

Designed to negotiate 1.5D or greater bends.

- Provides an effective seal when separating dissimilar fluids or dewatering.
- Equipped with two guide discs and four sealing discs made from Reliathane, Apache's special blend of wear-resistant polyurethane.
- With repeated use, sealing discs can experience wear and tear. The ED pig will reverse direction, without compromising its sealing capabilities.
- Every ED 16" – 48" pig is manufactured with by-pass ports. These ports feature threaded plugs that can be removed.
- Standard bumper noses cushion the pig and help to protect in-line auxiliary equipment.

Options Available:

- CARVER discs. See page 5-20 for additional information.
- Aluminum Gauge Plates in standard styles or slotted styles. See page 6-4 for additional information.
- Radial and Block Brush options available. See pages 5-23 to 5-26 for additional information.
- Magnets to collect metallic debris. See page 6-2 for additional information.
- Transmitter Cavity to accommodate electronic tracking equipment. See page 6-5 for additional information.
- Rattlers. See page 6-5 for additional information.