


VIPRS® Pig

2-10" (51-254mm)

The VIPRS® was designed to act as an effective squeegee while being able to traverse elbows with a radius as sharp as 1.5D. It will batch and remove liquid at pressures as low as 15PSI. The VIPRS® will accommodate variations in pipe IDs of the same nominal size.

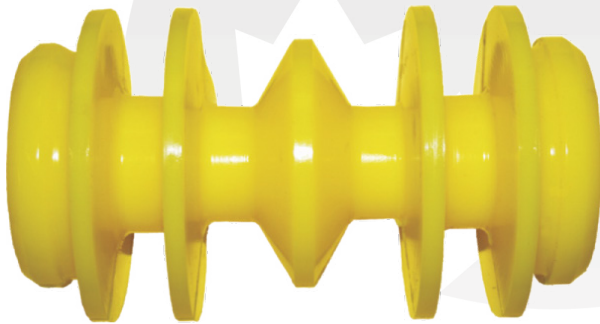

Size	Pipe I.D.	Description	Seal Discs O.D.	Overall Length
2"	1.870"	For SS Tubing	1.900"	3.400"
2"	2.067"	For S/40	2.100"	3.400"
2"	2.157"	For S/10	2.200"	3.400"
2.5"	2.370"	For SS Tubing	2.400"	4.600"
2.5"	2.637"	For S/10	2.700"	4.600"
3"	2.870"	For SS Tubing	2.900"	5.500"
3"	3.068"	For S/40	3.100"	5.500"
3"	3.260"	For S/10	3.300"	5.500"
3"	n/a	For S/5	3.400"	5.500"
4"	3.834"	For SS Tubing	3.900"	6.380"
4"	4.026"	For S/40	4.100"	7.500"
4"	4.260"	For S/10	4.320"	7.500"
6"	5.782"	For SS Tubing	5.900"	9.500"
6"	6.357"	For S/10	6.450"	9.500"
10"	n/a	For S/40	10.340"	17.360"

Applications:

- Terminal loading lines.
- Chemical processing.
- Petrochemical.
- Wood pulp and paper.
- Food and beverage.
- Water and wastewater treatment plants.
- Packaging, loading, process and product lines, piping.

Features & Benefits:

- Less wasted product means reduced BOC load charges.
- Reduced power costs mean greater efficiencies of flow and pressure.
- Cleaner product as a result of decreased product intermix.
- Reduced overtime through more efficient, faster clean-up.

Options Available:

- Trip Magnets for non- intrusive pig indicators.
- Available in polyurethane compounds for pipe and tubing sizes through 12" Nitrile, Viton® and other compounds available on request.
- Food grade material available.

Designed to negotiate 1.5D or greater bends.

*Apache Pipeline Products acknowledges the design contribution from Inline Services.