


ProVex FD™ Pig

2-42" (51-1067mm)

Versatile. Effective. Field-proven. To remove liquids from a pipeline, Apache offers the multi-faceted ProVex FD™ pig. Known throughout the pipeline industry as the ultimate pigging solution for achieving a liquid-free line, the durable ProVex FD™ is a particularly versatile bi-directional pig.

Not only does it remove liquids in natural gas lines, the ProVex FD™ successfully reduces wax build-up in crude oil pipelines, dewateres lines following hydrostatic testing, and executes nitrogen purging. In fact, it's one of the most multi-purpose pigs on the market today.

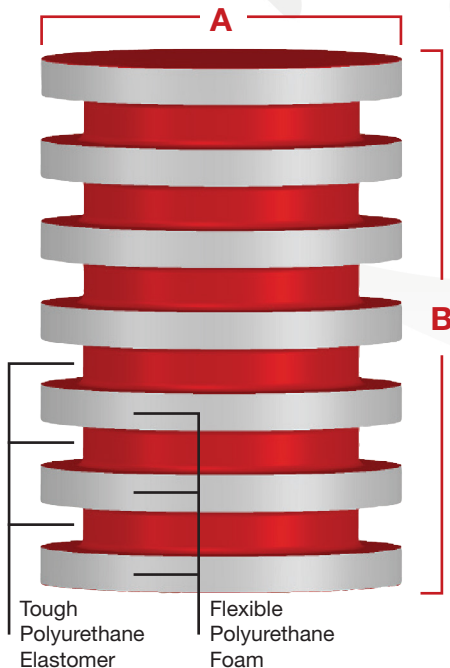

Size	A	B	Part #
2"	2.30"	3.38"	85-8002-00
3"*	3.00"	4.86"	85-8103-00
	3.40"	4.86"	85-8003-00
4"*	4.00"	6.63"	85-8104-00
	4.50"	6.63"	85-8004-00
6"	6.50"	9.50"	85-8006-00
8"	8.50"	11.25"	85-8008-00
10"	10.50"	14.50"	85-8010-00
12"	12.50"	17.76"	85-8012-00

Size	A	B	Part #
14"	14.00"	22.38"	85-8014-00
16"	16.00"	24.00"	85-8016-00
18"	18.00"	18.25"	85-8018-00
20"	20.00"	31.00"	85-8020-00
24"	24.00"	35.50"	85-8024-00
30"	30.00"	41.25"	85-8030-00
34"	34.00"	51.31"	85-8034-00
36"	36.00"	51.31"	85-8036-00
42"	42.00"	63.25"	85-8042-00

*3" and 4" sizes are for low flow applications or non metallic pipelines.

With its single piece construction, the ProVex FD™ pig easily negotiates 1.5D bends, allowing it to move reliably through piping systems.

Features & Benefits:

- Made from tough, flexible foam, the ProVex FD™ uses an engineered series of molded channels that provide multiple wiping discs. Each channel is coated with durable Apache Reliathane polyurethane elastomer to form a cutting edge on each disc, facilitating longer runs.
- It is bi-directional, so that it can run in either direction.

Options Available:

- Polypropylene handling rope for one or both ends of the pig for easy handling.
- Transmitter housing to accommodate electronic tracking equipment.
- Also available in light density (yellow) and hard density (blue).