


# CONICAL CUP

## UM2X

16-48" (406-1219mm)

The basic two cup UMX pigs are generally used for cleaning and scraping of pipelines. UM2X are also available in three and four cup configurations. By adding cups to the configuration the UM pig provides a positive seal between dissimilar fluids and are typically used for longer distance operations and for light cleaning of pipelines.

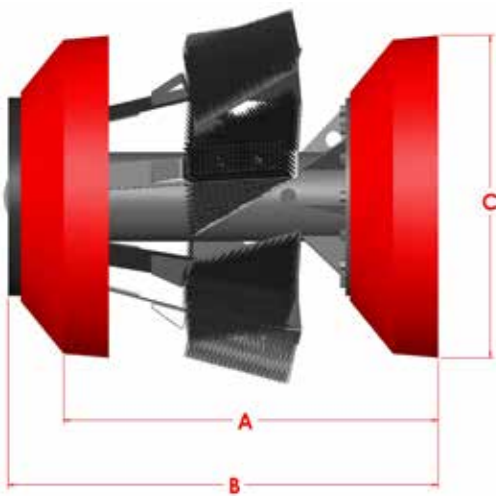

Size	A	B	C	Weight	Part #
16"	22.000	25.000	15.875	104	60514216
20"	27.250	30.875	20.000	165	60514220
22"	29.125	31.500	22.000	212	60514222
24"	29.500	33.875	24.000	230	60514224
30"	39.750	44.875	29.875	388	60514230
36"	45.750	52.250	36.000	551	60514236
42"	54.125	61.375	42.000	763	60514242
48"	60.375	68.625	48.000	937	60514248

### Features:

UMX pigs are equipped with Apache Series M cups manufactured from high quality Reliathane. Pipeline pigs mounted with conical cups can traverse pipeline anomalies of up to 20% without damage to inline auxiliary equipment. Standard bumper noses prevent damage to both the pig and in-line auxiliary equipment. All Apache 16"-48" pigs are manufactured with by-pass ports. The ports have threaded plugs that can be removed if by-pass is required.

Designed to traverse 1.5D bends.

### Options:

- Gauging plates of aluminum or steel, and either in slotted or standard styles.
- Transmitter cavity for electronic tracking equipment.
- Magnets are available.
- Plow blades.