


# CONICAL CUP

## UM3X

16-48" (406-1219mm)

The three cup UMX pigs are generally used for cleaning and scraping of pipelines. By adding cups to the configuration the UM pig provides a positive seal between dissimilar fluids and are typically used for longer distance operations and for light cleaning of pipelines.

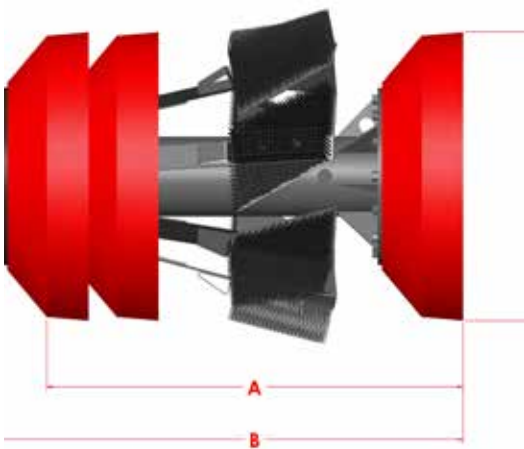

Size	A	B	C	Weight	Part #
16"	26.000	29.000	15.875	129	60514316
20"	33.250	36.875	20.000	212	60514320
22"	35.875	39.750	22.000	268	60514322
24"	36.500	40.875	24.000	301	60514324
30"	48.500	53.625	29.875	502	60514330
36"	55.125	61.750	36.000	716	60514336
42"	66.250	73.500	42.000	1015	60514342
48"	74.625	83.000	48.000	1244	60514348

### Features:

UMX pigs are equipped with Apache Series M cups manufactured from high quality Reliathane. Pipeline pigs mounted with conical cups can traverse pipeline anomalies of up to 20% without damage to inline auxiliary equipment. Standard bumper noses prevent damage to both the pig and in-line auxiliary equipment. All Apache 16"-48" pigs are manufactured with by-pass ports. The ports have threaded plugs that can be removed if by-pass is required.

Designed to traverse 1.5D bends.

### Options:

- Gauging plates of aluminum or steel, and either in slotted or standard styles.
- Transmitter cavity for electronic tracking equipment.
- Magnets are available.
- Plow blades.