


MODERATE CLEANING

DMDX

16-48" (406-1219mm)

Looking for more effective cleaning and sealing capacity? Then look no further than the Series DMDX. Every DMDX is equipped with two sealing discs and two Series M Cups. What sets the DMDX apart is that it features brushes that further enhance cleaning performance. These multiple sealing components provide a bigger surface area. As a result, its sealing capacity, scraping capability, and overall cleaning ability is greatly improved.

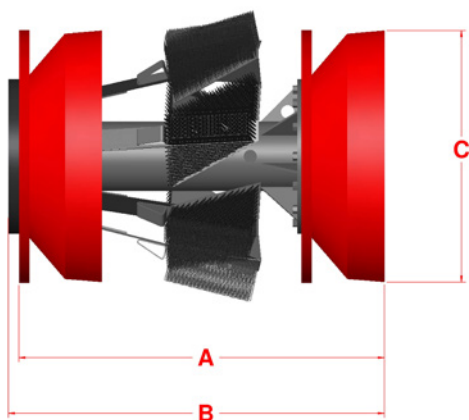

| Size | A | B | C | Weight | Part # |
|------|--------|--------|--------|--------|------------|
| 16" | 25.500 | 26.500 | 15.875 | 115 | 60-6900-16 |
| 20" | 31.500 | 32.500 | 20.000 | 187 | 60-6900-20 |
| 22" | 33.875 | 34.875 | 22.000 | 236 | 60-6900-22 |
| 24" | 34.875 | 35.875 | 24.000 | 264 | 60-6900-24 |
| 30" | 46.000 | 47.125 | 29.875 | 444 | 60-6900-30 |
| 36" | 53.625 | 55.000 | 36.000 | 653 | 60-6900-36 |
| 42" | 62.875 | 64.375 | 42.125 | 912 | 60-6900-42 |
| 48" | 70.500 | 72.125 | 48.125 | 1106 | 60-6900-48 |

Features & Benefits:

- The DMDX pig is configured to offer a sealing arrangement that is used to separate dissimilar fluids, and to moderately scrape pipelines during longer distance operations.
- Given that anomalies are a fairly common feature of a pipeline scheduled for maintenance, it's reassuring that pigs mounted with conical cups can traverse pipeline anomalies without damaging essential inline auxiliary equipment.
- Every Series DMDX pig is equipped with Apache Series M cups. As with all of Apache products, the Series M cup was especially developed to perform efficiently and reliably. To maximize durability, it's made from Reliathane, Apache's special blend of wear-resistant polyurethane.
- The large wearing surface of the cup promotes longer life, while product pressure holds the cutting edge firmly against the pipe wall.
- Every Apache DMDX 16"- 48" pig is manufactured with by-pass ports. These ports feature threaded plugs that can be removed, should by-pass be required. By removing the by-pass plugs, a portion of product flow is redirected through these openings. The debris is suspended in the turbulent flow and transferred ahead of the pig.
- Standard bumper noses cushion the pig and help to protect in-line auxiliary equipment, preventing damage.

Designed to negotiate 1.5D bends, the DMDX pig moves reliably through piping systems.

Options Available:

- Circular flange brushes or block brushes in the following types and trim materials:
 1. Trim types – flat wire or pencil.
 2. Trim material – carbon steel, stainless steel, plastic or tin-coated.
- Aluminum or steel gauging plates in slotted or standard styles.
- Transmitter housing to accommodate electronic tracking equipment.
- Magnets can be used to either collect ferrous and other construction debris, or they can be used to provide a change in magnetic field required by non-intrusive pig signaler detection devices.
- Urethane Plow Blades - Designed to replace a XB block brush, the 3-Rib urethane removes paraffin wax and similar deposits from the pipe wall that normally collect and cram between the bristles of a block brush. Our plow blade profile performs a similar function to the 3-Rib, but is used primarily for pipe sizes 16" - 18". Both blade types are also excellent tools for removing debris in non-metallic or internally coated pipe without damaging the pipe wall coating.
- Rattlers.

1575 - 90 Ave Edmonton, AB Canada T6P 0E2

Ph: 780.416.4850 | Fax: 780.416.4829 | apachepipe.com | Email: sales@apachepipe.com

2-15

world class world wide