


B A T C H I N G

UM4

3-14" (76-356mm)

Primarily used to batch dissimilar fluids, the Series UM4 is also very effective for separating fluids and looking after pipelines in need of light cleaning.

How is this possible? The answer lies in the three versions of the Series UM. The two-cup design of the UM2 pig provides a positive seal between fluid interfaces for efficient batching. The UM3 three-cup and UM4 four-cup design pigs are both used to gently clean pipelines and for batching and separation operations. They are typically used for longer distance operations.

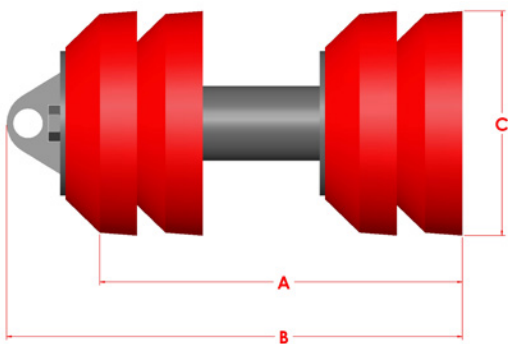

Size	A	B	C	Weight	Part #
3"	6.000	8.000	3.375	3.0	70-5804-03
4"	7.000	9.500	4.375	5.0	70-5804-04
6"	10.250	13.625	6.500	15	70-5804-06
8"	13.500	17.125	8.375	25	70-5804-08
10"	17.000	21.250	10.500	45	70-5804-10
12"	18.750	23.750	12.500	65	70-5804-12
14"	21.625	26.375	14.000	81	70-5804-14

Features & Benefits:

- Given that anomalies are a fairly common feature of a pipeline scheduled for maintenance, it's reassuring that pigs mounted with conical cups can traverse pipeline anomalies of up to 20% without damaging essential inline auxiliary equipment.
- Every Series UM pig is equipped with Apache Series M cups. As with all of Apache products, the Series M cup was especially developed to perform efficiently and reliably. To maximize durability, it's made from Reliathane, Apache's special blend of wear-resistant polyurethane.

Designed to negotiate 1.5D bends, the Series UM4 pig moves reliably through piping systems.

Options Available:

- Circular flange brushes in the following types and trim materials:
 1. Trim types – flat wire or pencil.
 2. Trim material – carbon steel, stainless steel or plastic.
- Aluminum or steel gauging plates in slotted or standard styles.
- UT Mandrel to accommodate electronic tracking equipment.
- Magnets can be used to either collect ferrous and other construction debris, or they can be used to provide a change in magnetic field required by non-intrusive pig signaler detection devices.