


UT MANDREL 6-12" (152-305mm)

The UT mandrel is very useful. Although it's primary design feature is to house a transmitter located in the center of the slotted universal mandrel, it can also accommodate virtually any configuration of cup, disc and brush. This also allows the pig to clean and batch many dissimilar fluids.

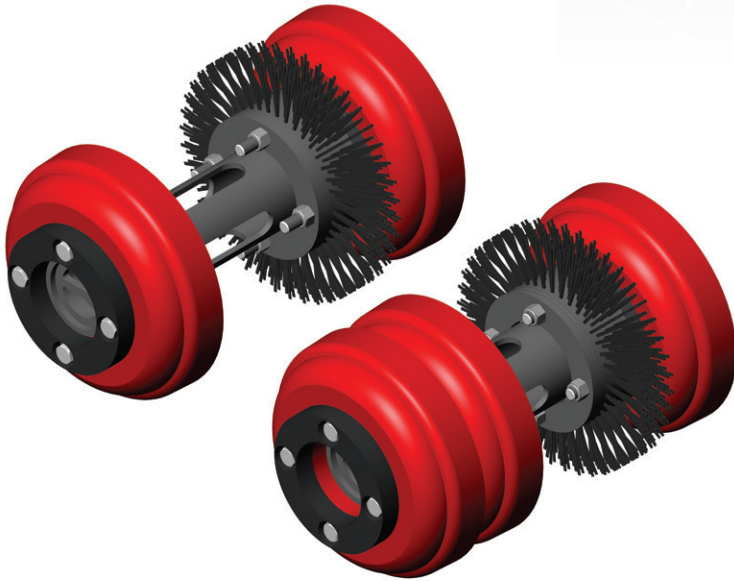

UTR-SC2R

SIZE	SEALING SURFACE	LENGTH	WIDTH	WEIGHT	PART #
6"	9.54"	11.31"	6.375"	11 lbs	60-3078-06
8"	11.93"	13.90"	8.500"	20 lbs	60-3078-08
10"	14.15"	16.40"	10.625"	35 lbs	60-3078-10
12"	17.77"	20.32"	12.750"	54 lbs	60-3078-12

UTR-SC3R

SIZE	SEALING SURFACE	LENGTH	WIDTH	WEIGHT	PART #
6"	10.07"	11.84"	6.375"	12.69 lbs	60-3079-06
8"	12.58"	14.56"	8.500"	23.30 lbs	60-3079-08
10"	14.91"	17.16"	10.625"	39.52 lbs	60-3079-10
12"	18.63"	21.19"	12.750"	62.60 lbs	60-3079-12

Features & Benefits:

- The UTR-SC2R pig features two cups and one circular flange brush, the UTR-SC3R pig features three cups and one circular flange brush.
- Every Series UTR-SC2R/UTR-SC3R pig is equipped with Apache Series UT-C cups. As with all Apache products, the Series UT-C cup was specifically developed to perform, efficiently and reliably. To enhance durability, it's made from Reliathane, Apache's special blend of wear-resistant polyurethane.
- The large wearing surface of the cup promotes longer life, while product pressure holds the cutting edge firmly against the pipe wall.
- To use a Series UTR-SC2R/UTR-SC3R pig for different applications, elements and brushes can simply be added or reconfigured.
- Every series UT pig features a transmitter cavity in the middle of the mandrel to accommodate electronic pig tracking equipment
- Standard bumper noses cushion the pig and help to protect in-line auxiliary equipment, preventing damage.

Designed to negotiate 1.5D bends, the Series UTR-SC2R/UTR-SC3R pigs move reliably through piping systems.

Options Available:

- Circular flange brushes in the following types and trim materials:
 1. Trim types – flat wire or pencil.
 2. Trim material – carbon steel, stainless steel or plastic.
- CARVER discs.
- Aluminum gauge plates in slotted or standard styles.
- Magnets can be used to either collect ferrous and other construction debris, or they can be used to provide a change in magnetic field required by non-intrusive pig signaler detection devices.

