


## DMD

16-48" (406-1219mm)

Every DMD is equipped with two sealing discs and two Series M cups. These components allow for a seal between dissimilar fluids while providing a bigger surface area. As a result, its sealing capacity, scraping capability are greatly improved.

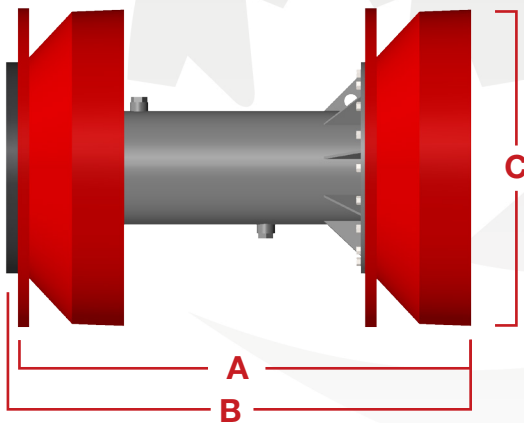

Size	A	B	C	Part #
16"	24.500	25.500	15.875	70-6850-16
20"	30.000	31.000	20.000	70-6850-20
22"	33.875	34.875	22.000	60-6850-22
24"	34.875	35.875	24.000	70-6850-24
30"	43.000	44.125	29.875	70-6850-30
36"	53.625	55.000	34.000	70-6850-36
42"	62.875	64.375	42.000	70-6850-42
48"	70.375	72.125	48.000	70-6850-48

Designed to negotiate 1.5D or greater bends.

### Features & Benefits:

- Equipped with two Apache Series M cups and two sealer discs made from Reliathane, Apache's special blend of wear-resistant polyurethane.
- The Conical M cup can traverse pipeline anomalies of up to 20% without damaging inline auxiliary equipment.
- Every DMD 16" – 48" pig is manufactured with by-pass ports. These ports feature threaded plugs that can be removed.
- Standard bumper noses cushion the pig and help to protect in-line auxiliary equipment.

### Options Available:

- CARVER discs. See page 5-20 for additional information.
- Aluminum Gauge Plates in standard styles or slotted styles. See page 6-4 for additional information.
- Radial and Block Brush options available. See pages 5-23 to 5-26 for additional information.
- Magnets to collect metallic debris. See page 6-2 for additional information.
- Transmitter Cavity to accommodate electronic tracking equipment. See page 6-5 for additional information.
- Rattlers. See page 6-5 for additional information.