


CONICAL CUP

UM4

3-14" (76-356mm)

The basic four cup Series UM pigs are generally used for batching of dissimilar fluids and are typically used for longer distance applications. The UM Series are available in three versions. The four cup design of this pig provides a positive seal between fluid interfaces and are widely used for light cleaning of pipelines or batching/separation operations.

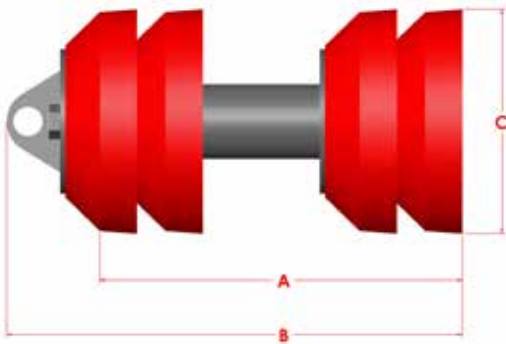

Size	A	B	C	Weight	Part #
3"	6.000	8.000	3.375	3.0	70580403
4"	7.000	9.500	4.375	5.0	70580404
6"	10.250	13.625	6.500	15	70580406
8"	13.500	17.125	8.375	25	70580408
10"	17.000	21.250	10.500	45	70580410
12"	18.750	23.750	12.500	65	70580412
14"	21.625	26.375	14.000	81	70580414

Features:

Configuration of the UM4 pig offers a sealing arrangement suitable for separation of dissimilar fluids together with light scraping of pipeline during longer distance operations. Pipeline pigs mounted with conical cups can traverse pipeline anomalies of up to 20% without damage to inline auxiliary equipment.

Designed to traverse 1.5D bends.

Options:

- Circular flat carbon steel, stainless steel, pencil or plastic brushes.
- Aluminum or steel gauging plates are available in either slotted or standard styles.
- Magnets are available.
- Available with UT configuration with internal transmitter housing for 6" - 14" pigs.