


Purger VP™

(Valve Pig)

2-12" (51-305mm)

The Purger VP™ can be launched and received by nearly any pigging valve on the market today. As it moves steadily through the line, the discs clean away debris and residue from the pipe wall.

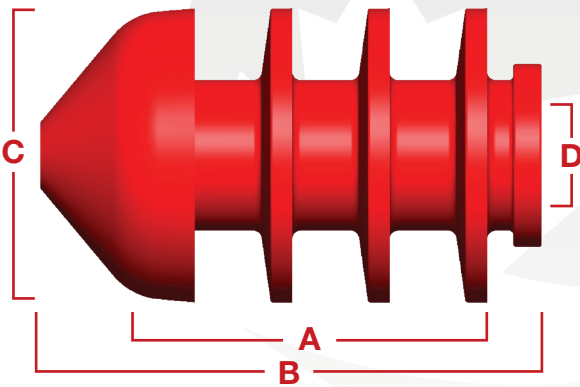


| Size | A | B | C | D | Part # |
|------|--------|--------|--------|-------|-------------|
| 2" | 2.375 | 4.000 | 2.250 | - | 71-0985-02S |
| 3" | 3.750 | 5.750 | 3.375 | - | 71-0985-03S |
| 4" | 3.875 | 7.375 | 4.375 | - | 71-0985-04S |
| 6" | 5.750 | 10.250 | 6.375 | - | 71-0985-06S |
| 8" | 8.375 | 14.750 | 8.625 | 2.875 | 71-0985-08 |
| 10" | 9.250 | 15.250 | 10.500 | 3.875 | 71-0985-10 |
| 12" | 11.250 | 18.500 | 12.500 | 4.500 | 71-0985-12 |

*Part numbers shown are for 85 Durometer (62 and 72 also available)

Note: Sizes 2" - 6" come standard as solid core, but are available in hollow core as well. Sizes 8" - 12" come standard as hollow core.

Designed to negotiate 1.5D or greater bends.

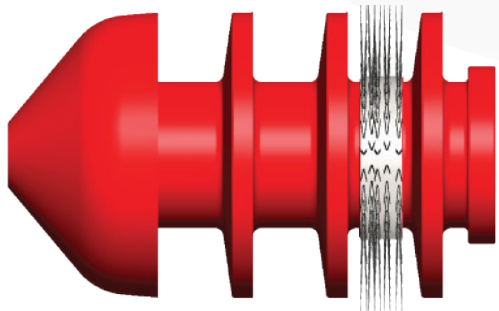

Features & Benefits:

- Lightweight.
- Improved sealing as hollow core allows pressure to expand the body.
- Can be utilized in Argus™, Masterflo™, and Meridian™ valves.

Options Available:

- Solid core available in 8" - 12".
- Variety of durometers.
- Wrap brushes. See page 5-22.
- Custom lengths available on request.

60-63 DUROMETER
 Very soft and pliable

70-75 DUROMETER
 Somewhat firm, but quite flexible

80-85 DUROMETER
 Firm with fair flexibility. Most common for solid-cast pigs

* Trademark names