
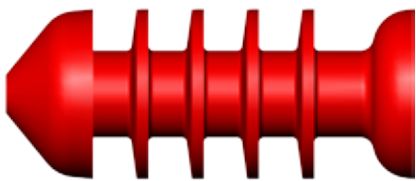


# ALL URETHANE

## PURGER II - solid cast

2-24" (51-610mm)

Apache Purger II are lightweight and easy to handle. The one-piece molded design has multiple seals for use in batching, cleaning or displacement applications. The solid all-urethane construction eliminates the anxiety of possible loss of parts commonly experienced with metal pigs. Both the leading and trailing flexible cups can pass up to 15% reductions in pipe.

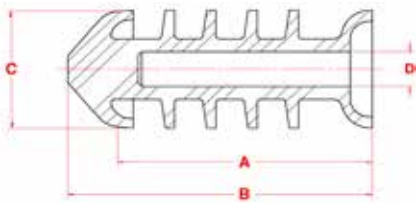

Size	A	B	C	D	Weight	Part #
2"	4.250	5.375	2.250	0.500	0.5	71-0285-02
3"	6.750	8.375	3.375	1.000	1.3	71-0285-03
4"	7.500	9.500	4.375	1.250	3.0	71-0285-04
6"	11.500	15.000	6.375	1.500	7.8	71-0285-06
8"	15.500	19.250	8.625	3.000	18	71-0285-08
10"	18.250	22.000	10.625	3.875	28	71-0285-10
12"	22.000	26.500	12.500	4.750	50	71-0285-12
14"	24.000	31.000	14.250	5.750	58	71-0285-14
16"	24.500	33.000	16.375	6.750	75	71-0285-16
18"	27.000	36.000	18.000	8.750	109	71-0285-18
20"	32.000	37.000	20.375	9.750	126	71-0285-20
22"	37.500	42.500	22.125	12.500	223	71-0285-22
24"	36.750	46.000	24.000	12.500	247	71-0285-24

\*Part numbers shown are for 85 Durometer (62 and 72 also available)

### Features:

- Light weight – no metal components.
- Flexible design allows easy navigation of bends.
- Improved sealing as hollow core allows pressure to expand pig body.
- Excellent for nitrogen purge applications
- **Designed to traverse 1.5D bends.**

### Options:

- Solid core.
- Variety of sizes and durometers.
- Flat steel wire, stainless or nylon brushes.
- Magnets are available.

**60-63 DUROMETER**  
Very soft and pliable

**70-75 DUROMETER**  
Somewhat firm but quite flexible

**80-85 DUROMETER**  
Most common for solid cast pigs  
Firm with fair flexibility